



technical specifications LR16B

general

- Double-tuned band-pass design with high efficiency
- Neodymium 15" drivers for excellent performance-to-weight ratio
- 15mm Birch with clever bracing brings lightweight yet rigid cabinet construction
- High WLL flying system
- Stackable and flyable with LR16 or in separate arrays
- SIS pre-wired for very high damping and further reduced distortion (with ALC)
- Dedicated protection in combination with SDP modules (with ALC)
- Durotect™ scratch-resistant coating

description

The LR16Bass is a double-tuned band-pass bass system, for both permanent and portable applications. Featuring double 15" long excursion woofers with Neodymium magnet structures, the LR16Bass delivers high quality, high output bass response from a compact and weight efficient package. The special band-pass configuration offers LR16-matched bass response in full-space (flown) and increased efficiency in half-space




(stacked) applications. The easy and accurate flying system, makes the system quick to set-up in combination with the LR16 line-array module.

The SIS pre-wiring ensures complete cable/connector compensation between the LR16Bass and ALC. The LR16Bass is designed as high-efficient bass extension of the LR16, used in multiples depending on the array-length and low frequency requirements.

For full system performance, we recommend using the LR16Bass in combination with an ALC2 or ALC4 amplifier/controller. Driven by the ALC, the LR16Bass delivers maximum sound quality and output power with dedicated and inaudible (power and excursion!) protection (SDP circuit).

technical specifications LR16B

dimensional drawing

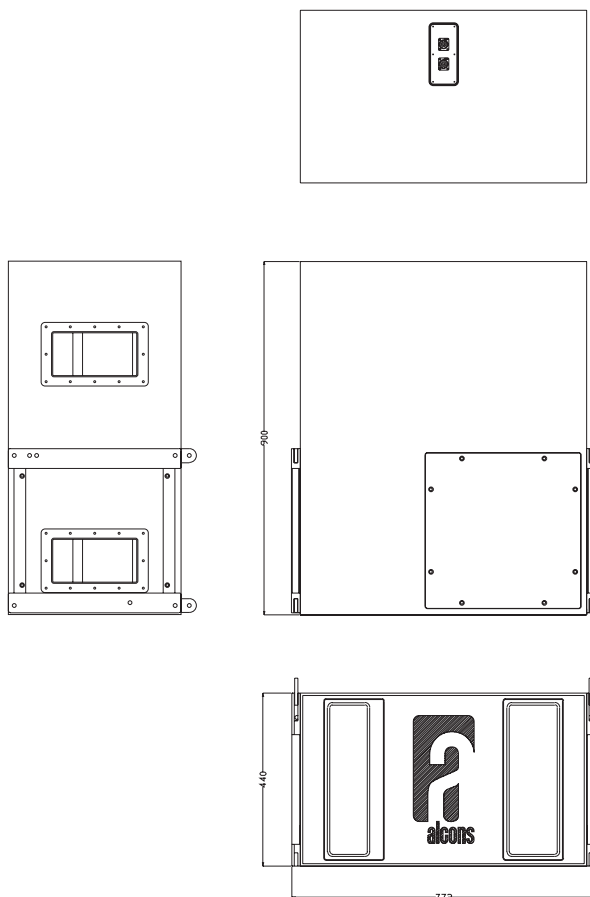

technical specifications

Frequency Response

+/- 3 dB 46 Hz - 200 Hz

+/- 10 dB 37 Hz -

Sensitivity (SPL 1W/M) 102 dB

Nominal Impedance 4 Ohm

Maximum RMS power 1000 Watt

Maximum peak power 3200 Watt

SPL program/peak 132/137 dB

Dispersion H x V omni

physical specifications

System subwoofer, band-pass

Drivers LF 2 x AW15.3ND 15",
double vented

Cross-over frequency HP 40 Hz. recommended

Connectors 2 x Speakon NL4 input

Physical dimensions mm inches

Height 440 17,3

Width 772 30,4

Depth 900 35,4

Weight (approx.) 49 kg (108 lb)

Warranty 6 years limited

A: Alcons Audio B.V.
De Corantijn 69
1689 AN Zwaag
The Netherlands

E: info@alconsaudio.com
W: www.alconsaudio.com
T: +31 (0)229 28 30 90
F: +31 (0)229 28 30 99